

HYPERDESMO®-ADY

One component, transparent, glossy, aliphatic, polyurethane liquid membrane.

DESCRIPTION

HYPERDESMO®-ADY is a one-component polyurethane fluid which cures with the humidity in the atmosphere to produce a transparent membrane with uniform adhesion over the entire surface. It is aliphatic: No yellowing as a result of direct exposure to sunlight.

It is based on pure elastomeric hydrophobic polyurethane resin, which results in excellent mechanical, chemical, thermal, UV and natural element resistance properties.

Apply with brush, roller or airless spraying in one or two coats. Minimum consumption per coat: 0.1 kg/m².

RECOMMENDED FOR

For waterproofing and protection of:

- Industrial floors,
- building materials like stone, marble, bricks and wood,
- metals like iron, steel and aluminium,
- door and window casings,
- wooden floors,
- furniture.

LIMITATIONS

Not recommended for:

- Unsound substrates,
- application in thick coats.

FEATURES & BENEFITS

- Quick curing,
- Strong and uniform adhesion over the entire surface,

- Excellent heat and ultraviolet/UV resistance, it will not yellow, peel or soften up to 80 °C,
- Outstanding resistance to chemicals and mechanical stresses (high tensile strength and resistance to friction).

APPLICATION PROCEDURE

Clean the surface using a high pressure washer, if possible. Remove oil, grease and wax contaminants. Cement laitance, loose particles, mould release agents, cured membranes, etc. must be removed. Glassy surfaces must either be graded or a primed with PRIMER-T. Further primer information available on request. The application surface must be **dry**.

When used as a topcoat, for colour protection of HYPERDESMO®, it must be pigmented with ALCHIMICA's pigment pastes (10% max). When used as a topcoat to a flooring product, e.g. epoxy/polyurethane paint or self-levelling systems, it should be applied pigmented, again, (with ALCHIMICA's pigment pastes 10% max) within 24 hours of application of the main coat.

Preparation:

When stirring (or pigmenting) take care not to introduce air in the mix, which may result in bubbling on the cured membrane. Stirring can either be done manually or with a with a low speed (300 rpm) mixer.

Application:

Apply with brush, roller or airless spraying in one or two coats. Do not leave more than 48 hours between coats.

HYPERDESMO[®]-ADY



If applied non-pigmented, you are advised to consider whether there are any UV resistance requirements for the substrate or surface on which it is applied. For more information, please contact our support department.

CONSUMPTION

Minimum consumption per coat: **0.1 kg/m²**.

CLEANING

Clean tools and equipment first with paper towels and then using SOLVENT-01. Rollers will not be re-usable.

PACKAGING

1 lt, 4 lt and 20 lt.

TECHNICAL SPECIFICATIONS

In liquid form (before application):

50% dry matter in Xylol.

PROPERTY	UNITS	METHOD	SPECIFICATION
Viscosity (Brookfield)	cP	ASTM D2196-86, @ 25 °C	100
Specific weight	gr/cm ³	ASTM D1475 / DIN 53217 / ISO 2811, @ 20 °C	0.95
Tack free time, @ 77 °F (25 °C) & 55% RH	hours	-	4-6
Recoat time	hours	-	6-24

The cured membrane:

PROPERTY	UNITS	METHOD	SPECIFICATION
Service temperature	°C	-	-40 to 80
Max. temperature short time (shock)	°C	-	200
Hardness	Shore D	ASTM D2240 / DIN 53505 / ISO R868	> 60


Certified quality, environmental and occupational health & safety management systems:
ISO 9001/14001 & OHSAS 18001.



HYPERDESMO[®]-ADY

Tensile strength at break @ 23 °C	Kg/cm ² (N/mm ²)	ASTM D412 / EN-ISO-527-3	550 (55)
Percent elongation @ 23 °C	%	ASTM D412 / EN-ISO-527-3	> 50
Water vapor transmission	gr/m ² .hr	ASTM E96 (Water Method)	0.8
QUV Accelerated Weathering Test (4hr UV, @ 60 °C (UVB-Lamps) & 4hr COND @ 50 °C)	-	ASTM G53	passed (2000 hours)
Hydrolysis (Potassium Hydroxide 8%, 10 days @ 60 °C)	-	-	no significant elastomeric property change
Hydrolysis (Sodium Hypochlorite 5%, 10 days)	-	-	no significant elastomeric property change
Water absorption	-	-	< 1%

NONE OF OUR PUBLISHED INSTRUCTIONS AND SPECIFICATIONS, IN WRITING OR OTHERWISE, ARE BINDING EITHER IN GENERAL OR WITH RESPECT TO ANY THIRD PARTY RIGHTS, OR DO THEY RELIEVE INTERESTED PARTIES OF THEIR DUTY TO SUBJECT THE PRODUCT TO AN ADEQUATE EXAMINATION OF ITS SUITABILITY. IN NO EVENT WILL ALCHIMICA S.A. BE RESPONSIBLE FOR DAMAGES OF ANY NATURE, WHATSOEVER, RESULTING FROM THE USE OF OR RELIANCE UPON INFORMATION OR THE PRODUCT TO WHICH INFORMATION REFERS.

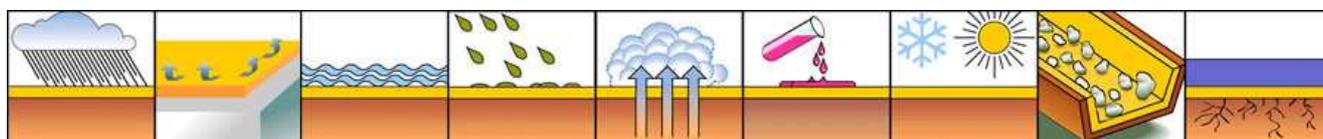

Certified quality, environmental and occupational health & safety management systems:
ISO 9001/14001 & OHSAS 18001.

